

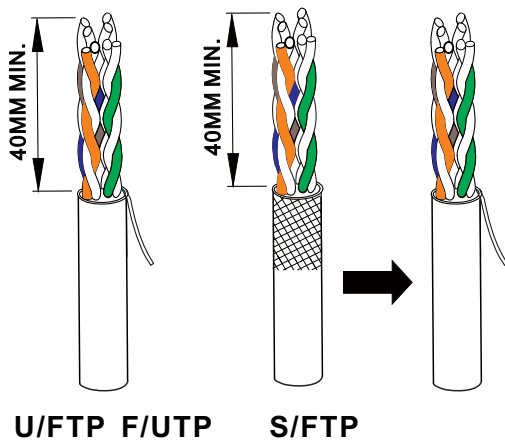


KEYSTONE JACK USER GUIDE


KJ66FME

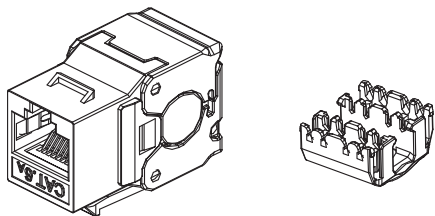



1




2

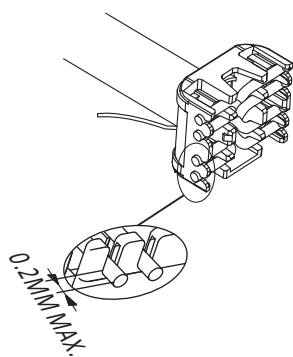




3

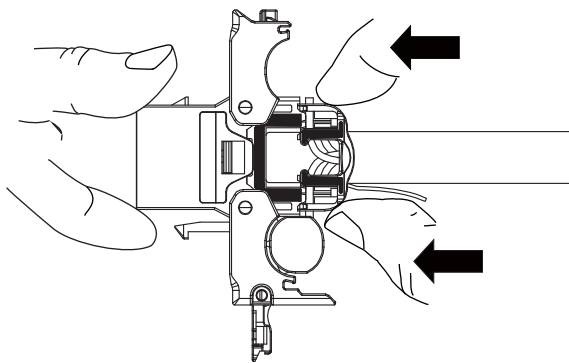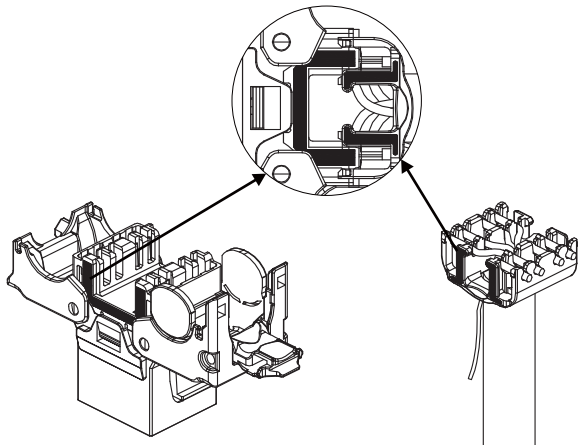

4

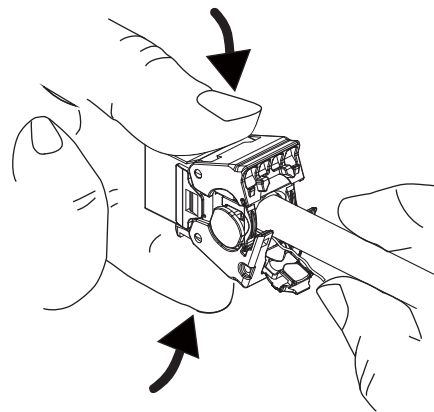


5

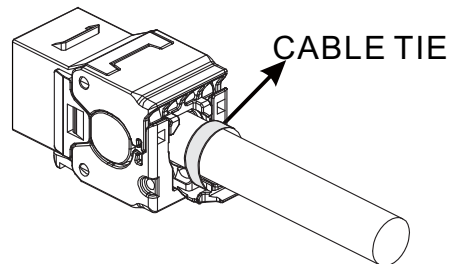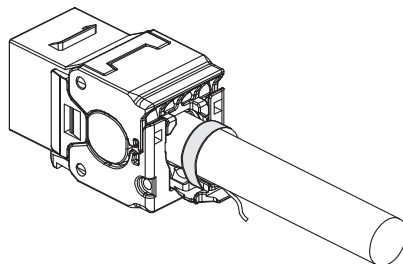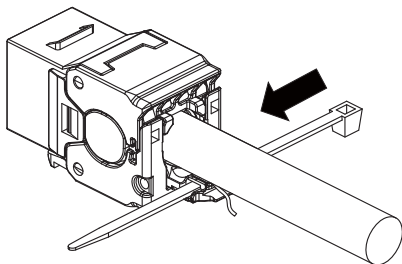

THE MATED PLUG SHOULD COMPLY WITH FCC PART 68 SUBPART F RULES AND IEC 60603-7.


1

GROUNDING
WIRE

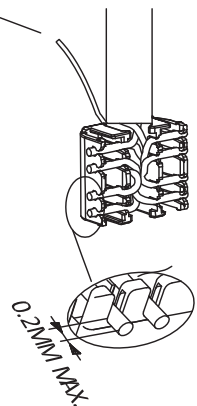



2

2A
FOR LEFT ENTRANCE

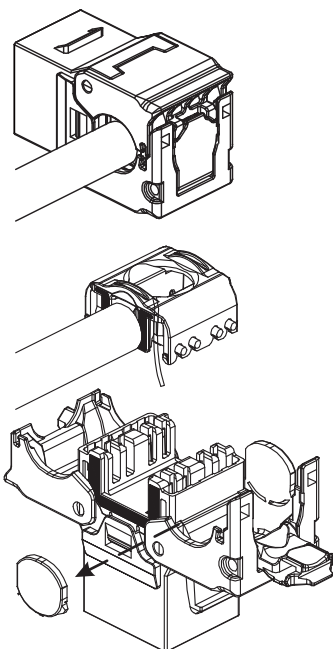


2B
FOR RIGHT ENTRANCE

ALIGN THIS MARK FOR BOTH
LEFT & RIGHT ENTRANCE

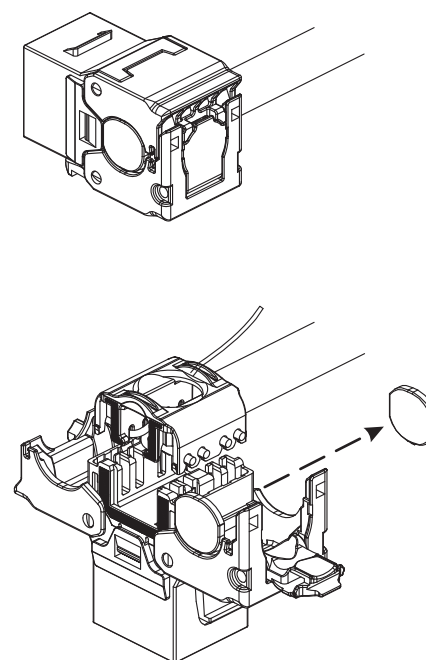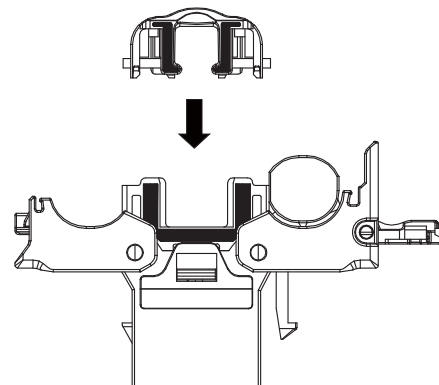



3

PUT THE CAP INTO
POSITION

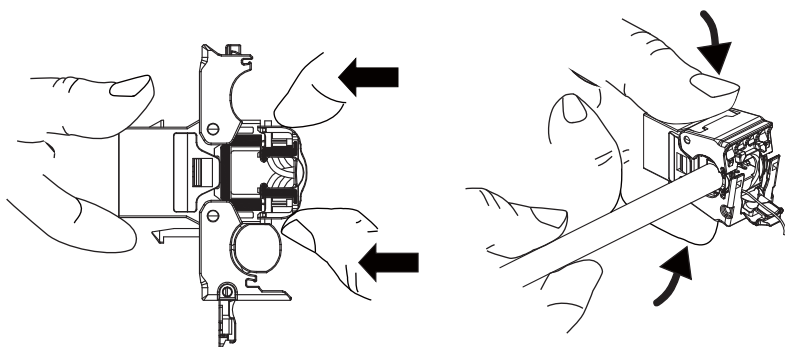

4

GROUNDING
WIRE



CUT THE REMAINING
GROUNDING WIRE

FINISHED

